



DATE: 03 March 2015

I.T.L. (PRODUCT TESTING) LTD.

**Test Report According to
EN 301 489-1; EN 301-489-3;
EN 301 489-7; EN 301 489-19**

for

Pointer Telocation Ltd.

Equipment under test:

Asset Tracking Device

**CelloTrack Power 3Y P/N GT976001-000
CelloTrack 3Y P/N GT9760012-000
CelloTrack XT P/N GT9760025-000
CelloTrack 8M P/N GT9760022-000
CelloTrack Power XT P/N GT9760026-000
CelloTrack Power 8M P/N GT9760021-000***

*See customer's Declaration on page 4

Tested by:


A. Yizhak

Approved by:


D. Shidlowsky

This report must not be reproduced, except in full, without the written permission of I.T.L. (Product Testing) Ltd. This report relates only to items tested.



TABLE OF CONTENTS

1.	GENERAL INFORMATION	3
1.1	Administrative Information	3
1.2	Abbreviations and Symbols	5
1.3	List of Accreditations	6
2.	APPLICABLE DOCUMENTS	7
3.	TEST SITE DESCRIPTION	8
3.1	Location	8
3.2	Shielded Room	8
3.3	Open Site	8
3.4	Ground Plane	8
3.5	Antenna Mast	8
3.6	Turntable	8
3.7	EMI Receiver	9
3.8	E.U.T. Support	9
3.9	Test Equipment	9
4.	SUMMARY OF TEST RESULTS	10
5.	EQUIPMENT UNDER TEST (E.U.T.) DESCRIPTION	11
5.1	List of ancillary and/or support equipment provided by the applicant	12
5.2	Description of Interface Cables for Testing	12
6.	LIST OF TEST EQUIPMENT	13
6.1	Immunity Tests	13
6.1	Emission Tests	14
7.	E.U.T. PERFORMANCE VERIFICATION	15
7.1	Mode of Operation	15
7.2	Monitoring of E.U.T.	15
7.3	Definition of Failure	16
8.	CONDUCTED EMISSION FROM DC PORT	17
8.1	Test Specification	17
8.2	Test Procedure	17
8.3	Test Results	17
9.	IMMUNITY TO ELECTROSTATIC DISCHARGE	22
9.1	Test Specification	22
9.2	Test Procedure	22
9.3	Test Results	22
10.	IMMUNITY TO RADIATED FIELD	27
10.1	Test Specification	27
10.2	Test Procedure	27
10.3	Test Results	27
11.	SET UP PHOTOGRAPHS	29
12.	SIGNATURES OF THE E.U.T'S TEST ENGINEERS	31




1. General Information

1.1 Administrative Information

Manufacturer:	Pointer Telocation Ltd.
Manufacturer's Address:	14 Hamelacha St., Rosh Ha'ayin, 48091 Israel Tel: +972-3-572-3111 Fax: +972-3-572-3100
Manufacturer's Representative:	Itamar Gohary
Equipment Under Test (E.U.T):	Asset Tracking Device
Equipment Model No.:	CelloTrack Power 3Y P/N GT976001-000*
Equipment Serial No.:	820052
Date of Receipt of E.U.T:	02.07.14
Start of Test:	02.07.14
End of Test:	03.07.14
Test Laboratory Location:	I.T.L (Product Testing) Ltd. 1 Batsheva St., Lod ISRAEL 7120101
Test Specifications:	See Section 2

*See customer's Declaration on following page.



POINTER



CelloTrack Division
Pointer Telocation Ltd.

Date: 24 July 2014

Declaration

I hereby declare that the **CelloTrack Power 3Y GT9760001-000** is a full configuration model. The below model's:

Product Name:	Part Number:
GT9760012-000	CelloTrack 3Y
GT9760025-000	CelloTrack XT
GT9760022-000	CelloTrack 8M
GT9760026-000	CelloTrack Power XT
GT9760021-000	CelloTrack Power 8M

differs from the **CelloTrack Power 3Y GT9760001-000** only by different Internal battery type\removal of battery charger components\External Harness connection. Please relate to all models (from an EMC/Radio point of view) as the same product.

Thank you,
Signature:  *Pointer Telocation Ltd.*

Itamar Gohary
Certification Manager
Pointer Telocation Ltd.

1.2 Abbreviations and Symbols

The following abbreviations and symbols are applicable to this test report:

A/m	ampere per meter
AC	alternating current
AM	amplitude modulation
ARA	Antenna Research Associates
Aux	auxiliary
Avg	average
CDN	coupling-decoupling network
cm	centimeter
dB	decibel
dBm	decibel referred to one milliwatt
db μ V	decibel referred to one microvolt
db μ V/m	decibel referred to one microvolt per meter
DC	direct current
EFT/B	electrical fast transient/burst
EMC	electromagnetic compatibility
ESD	electrostatic discharge
E.U.T.	equipment under test
GHz	gigahertz
HP	Hewlett Packard
Hz	Hertz
kHz	kilohertz
kV	kilovolt
LED	light emitting diode
LISN	line impedance stabilization network
m	meter
mHn	millihenry
MHz	megahertz
msec	millisecond
N/A	not applicable
per	period
QP	quasi-peak
PC	personal computer
RF	radio frequency
RE	radiated emission
sec	second
V	volt
V/m	volt per meter
VRMS	volts root mean square



1.3 List of Accreditations

The EMC laboratory of I.T.L. is accredited by the following bodies:

1. The American Association for Laboratory Accreditation (A2LA) (U.S.A.), Certificate No. 1152.01.
2. The Israel Ministry of the Environment (Israel), Registration No. 1104/01.
3. The Voluntary Control Council for Interference by Information Technology Equipment (VCCI) (Japan), Registration Numbers: C-3006, R-2729, T-1877, G-245.
4. Industry Canada (Canada), File No. IC 6183.

I.T.L. Product Testing Ltd. is accredited by the American Association for Laboratory Accreditation (A2LA) and the results shown in this test report have been determined in accordance with I.T.L.'s terms of accreditation unless stated otherwise in the report.

2. Applicable Documents

- | | | |
|-----|---|--|
| 2.1 | R&TTE Directive: 1999 | <i>DIRECTIVE 1999/5/EC OF THE EUROPEAN PARLIAMENT AND OF THE COUNCIL of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity</i> |
| 2.2 | EN 301 489-1 V1.9.2: 2011 | <i>Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 1: Common technical requirements</i> |
| 2.3 | EN 301 489-3 V1.6.1: 2013 | <i>Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 3: Specific conditions for Short-Range Devices (SRD) operating on frequencies between 9 kHz and 246 GHz</i> |
| 2.4 | EN 301 489-7 V1.3.1: 2005 | <i>Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 7: Specific conditions for mobile and portable radio and ancillary equipment of digital cellular radio telecommunications systems (GSM and DCS)</i> |
| 2.5 | EN 301 489-19 V1.2.1: 2002 | <i>Electromagnetic compatibility and Radio spectrum Matters (ERM); ElectroMagnetic Compatibility (EMC) standard for radio equipment and services; Part 19: Specific conditions for Receive Only Mobile Earth Stations (ROMES) operating in the 1,5 GHz band providing data communications</i> |
| 2.6 | EN 55022: 2006 + Amendment A1: 2007 | <i>Limits and Methods of Measurement of Radio Disturbance Characteristics of Information Technology Equipment.</i> |
| 2.7 | EN 61000-4-2: 2009 | <i>Electromagnetic Compatibility (EMC), Part 4: Testing and Measurement Techniques; Section 2: Electrostatic discharge immunity test: Basic EMC publication.</i> |
| 2.8 | EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010 | <i>Electromagnetic Compatibility (EMC), Part 4: Testing and Measurement Techniques; Section 3: Radiated, radio frequency, electromagnetic field immunity test.</i> |

3. Test Site Description

3.1 Location:

The Electromagnetic Compatibility Test Facility of I.T.L. (Product testing) Ltd. Is located at

Telrad Industrial Park, Lod, 7120101 Israel.

Telephone: +972-8-9153100

Fax: +972-8-9153101

3.2 Shielded Room

A Modular Shielded Room, Type 20 SpaceSaver, manufactured by ETS, consisting of a Main Room and a Control Room.

The dimensions of the Main Room are: length: 7.0 m, width: 3.0 m, height: 3.0 m.

The shielding performance is:

magnetic field: 60 dB at 10 kHz rising linearly to 100 dB at 100 kHz,

electric field: better than 110 dB between 50 MHz and 1 GHz,

plane wave: 110 dB between 50 MHz and 1 GHz.

All the power lines entering the shielded room are filtered.

3.3 Open Site:

The OATS is located on a one floor-building roof. The OATS consists of 3 meter and 10 meter ranges, using a 21.5m X 8.5m solid metal ground plane, a remote controlled turntable and an antenna mast.

3.4 Ground Plane:

The ground plane is made from steel plates, which are welded continuously together. The Ground plane is lies and welded on welded steel construction with vias to allow for water drainage. All the power, control, and signal lines to the turntable and the 3 m and 10m antenna mast outlets are routed in shielded conduits under the plane to the control building.

3.5 Antenna Mast:

ETS model 2070-2. The antenna position and polarization are remote controlled via Fiber Optical Link using ETS/EMCO Dual Controller Type 2090. The antenna position is adjustable between 1-4 meters. Pressurized air is used to power changing the polarity of the antenna.

3.6 Turntable:

ETS model 2087 series. The position of the turntable is remote-controlled via Fiber Optic Link, using ETS/EMCO Dual Controller Type 2090. The turntable is mounted in a pit and its surface is flush with the Open Site Ground Plane. Brushes near the periphery of the turntable ensure good conductive connection to the ground plane. The Turntable maximum load is 1250 Kg.



3.7 EMI Receiver:

Type ESIB7, manufactured by Rohde & Schwarz, being in full compliance with CISPR 16 requirements.

3.8 E.U.T. Support:

Table mounted E.U.T.s are supported during testing on 80 cm high all plastic table.

3.9 Test Equipment:

See details in Section 6.

4. Summary of Test Results

Test	Results
<p>Conducted Emissions From DC Port EN 55022: 2006 + Amendment A1: 2007, Class B</p>	<p>The E.U.T met the performance requirements of the specification.</p> <p>The margin between the emission levels and the specification limit is, in the worst case, 29.37 dB for the DC Plus line at 0.198 MHz and 28.12 dB at 0.158 MHz for the DC Minus line.</p>
<p>ESD EN 61000-4-2: 2009 Air Discharge, 8kV Contact Discharge, 4kV</p>	<p>The E.U.T met the performance requirements of the specification.</p>
<p>Radiated Immunity EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010 (80-1000; 1400-2700 MHz) 3 V/m, 80% A.M. by 1kHz</p>	<p>The E.U.T met the performance requirements of the specification.</p>

5. Equipment Under Test (E.U.T.) Description

The CelloTrack family is comprised of a small, standalone tracking device intended for mobile assets and assets having limited access to power or without a power supply at all.

The capabilities provided by the CelloTrack family can greatly reduce an enterprise's financial losses incurred as a result of the often difficult task of successfully tracking equipment such as trailers, containers and trains.

CelloTrack supports tracking, communication, GPS location-based features and maintenance capabilities similar to the compact family and supports also the following additional features:

Durability and long life, making it ideal for tracking trailers, trains, containers, high-value assets, and more.

Stand-alone tracking device. May be installed without a power supply.

An internal long-life 13.6 AHr rechargeable Li-Polymer battery providing up to three years of autonomous operation without recharging (subject to the rate of transmission).

Advanced power management algorithms preserving battery power and extending battery life period.

Highly durable IP67 weatherproof casing that houses all components – battery, GSM module and GPS module.

A 3D accelerometer that detects movement of assets and enables different transmission rates for a moving asset and a standing asset.

A programmable (ON/OFF/Test/Panic) push button, charging and communication capabilities, a tamper switch to detect tampering and two monitoring LEDs.

Almost instant assembly and removal.

Minimal maintenance.

The CelloTrack family includes the following units:

CelloTrack 3Y;

CelloTrack XT;

CelloTrack 8M;

CelloTrack Power 3Y;

CelloTrack Power XT;

CelloTrack Power 8M.



5.1 List of ancillary and/or support equipment provided by the applicant

Description	Manufacturer	Model/Part Number	Serial Number
Computer	Lenovo	T410I	25184PG

5.2 Description of Interface Cables for Testing

Cable Type	Shield	Length [m]	Ferrite	Connection1	Connection2
Power (12VDC)	No	3M	No	--	--

6. List of Test Equipment

6.1 Immunity Tests

Equipment indicated below by an “X” used in Tests IEC 61000-4:-2,-3,-4,-5,-6,-8,-11.

Test equipment calibration is in accordance with ITL Q.A. Procedure PM 110, "Calibration Control Procedure", which complies with ISO 9002 and ISO/IEC Guide 17025.

Instrument	Manuf.	Model	Serial No.	Used in Test IEC 61000-4:						
				-2	-3	-4	-5	-6	-8	-11
Transient Generator	KeyTek	CEMASTER	9612436							
Transient Generator	EM Test	EFT 500 F1	1198-01							
ESD Simulator	CDI	ESD 2000i	426	X						
ESD Simulator	Schaffner	NSG 435	174-002-001(Z1)	X						
Isotropic Field Probe	AR	EP-2080	23190		X					
RF Amplifier	AR	100W1000M1	19842		X					
Isotropic Field Monitor	AR	FM-2000	19719		X					
Biconilog Antenna	EMCO	3142B	1078		X					
Horn Antenna	A.H. systems	SAS 200/571	199		X					
RF Amplifier	OPHIR	5303081	1002		X					
RF Amplifier	IFI	SMX100	1194-4537		X					
RF Amplifier	IFI	M100	M612-0208		X					
Signal Generator	HP	8657A	2849U01094		X					
BulkF Current Probe	FCC	F-120-9	105							
CDN	FCC	FCC-801-M3-16A	9962							
Transient Wave- form Monitor	CDI	TWM-100	3233							
Phase Control Amplifier	CDI	PCA-1000	3217							
Single Phase Isolated Backfilter	CDI	CDI-1kVA	3221							
Surge Generator	CDI	CDI-1000i	3153							
1.2/50; 8/20usec AC Surge Unit	KeyTek	E551	9512398							
Surge Generator	EM TEST	UCS 500-M	1198-45							
AC Power Source	EM TEST	UCS 500-M	1198-45							
Current Generator	FCC	F-1000-4-8-125A	9838							
Magnetic Loop	FCC	F-1000-4-8/9/10-L-1M	9836							



6.1 Emission Tests

The equipment indicated below by an “X” was used for testing Conducted Emission Power Lines(CEP), Conducted Emission Telecom(CET), Radiated Emission (RE), and EN 61000-3-2; -3

Test equipment calibration is in accordance with ITL Q.A. Procedure PM 110 "Calibration Control Procedure", which complies with ISO 9002 and ISO/IEC Guide 17025.

Instrument	Manufacturer	Model	Serial No.	Used in Tests				
				CEP	CET	RE	EN 61000-3	
							-2	-3
ISN	T3SEQ	ISN T8-Cat 6	28749					
ISN	T3SEQ	ISN T800	27986					
LISN	Fischer	FCC-LISN-2A	127	X				
Transient Limiter	HP	11947A	3107A03041	X				
Current Probe	FCC	F51	163					
EMI Receiver	Rohde & Schwarz	ESC17	100724	X				
EMI Receiver	Rohde & Schwarz	ESIB7	100120					
RF Amplifier	HP	83006A	3104A00589					
RF Amplifier	MITEQ	50-8P	AFSX4					
EMC Analyzer	HP	HP8593	3536A00120					
Biconilog Antenna	EMCO	3142B	1250					
Horn Antenna	ETS	3115	6142					
Antenna Mast	ETS	2070-2	9608-1497					
Turntable	ETS	2087	-					
Mast & Table Controller	ETS/EMCO	2090	9608-1456					
Power Analysis System	EM Test	DPA 500	0501/09					
AC Power Source	EM Test	ACS 500	1101/01					

7. E.U.T. Performance Verification

7.1 Mode of Operation

The E.U.T. was operated in regular operation mode. Power supply was supplied 12 VDC.


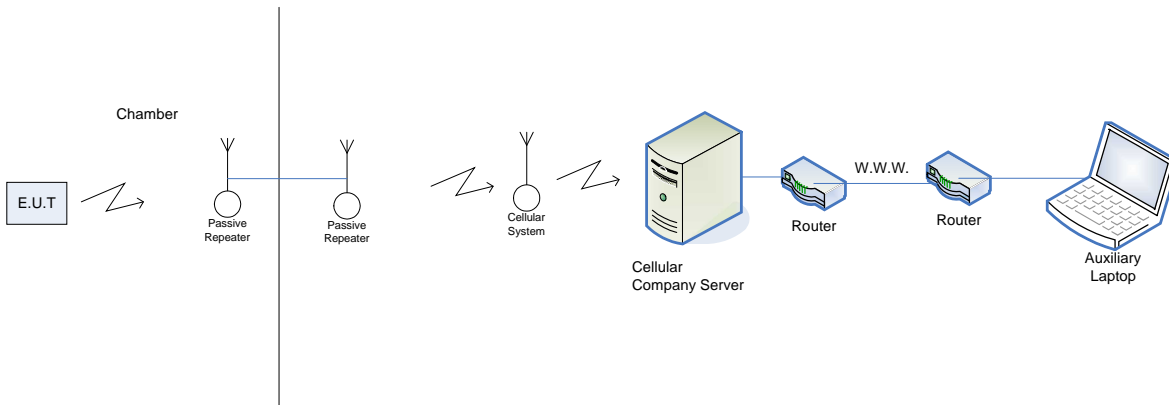


Figure 1. Test Set-up

7.2 Monitoring of E.U.T.

The EUT transmission every 4 seconds was observed on the auxiliary laptop display. The status of the GPS was monitor by observing its status on the auxiliary laptop display.

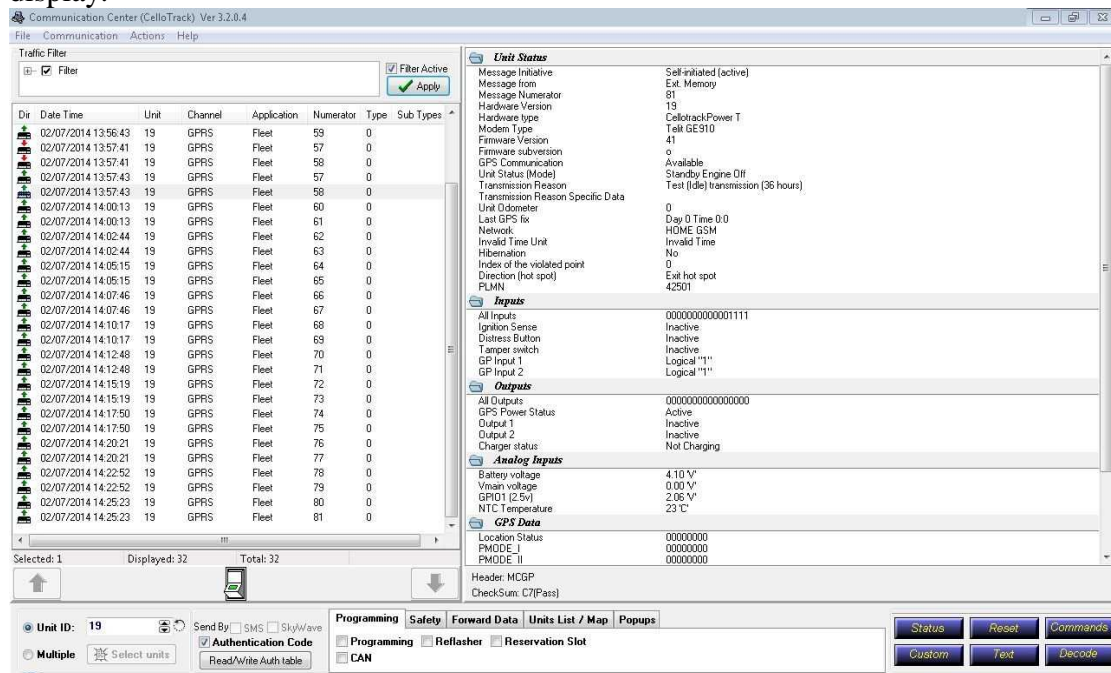

The screenshot shows the Communication Center (CelloTrack) Ver 3.2.0.4 software interface. The main window is divided into several sections:

- Traffic Filter:** A table showing traffic logs with columns for Dir, Date Time, Unit, Channel, Application, Numerator, Type, and Sub Types. The table contains 32 rows of data.
- Unit Status:** A detailed view of the selected unit's status, including Message Initiative, Message from, Message Numerator, Hardware Version, Modem Type, Firmware Version, Unit Status (Mode), and Transmission Reason Specific Data.
- Inputs:** A section showing the status of various inputs such as All Inputs, Ignition Sense, Distress Button, Target switch, GP Input 1, and GP Input 2.
- Outputs:** A section showing the status of various outputs such as All Outputs, GPS Power Status, Output 1, Output 2, and Charge status.
- Analog Inputs:** A section showing the status of analog inputs such as Battery voltage, Vmain voltage, GFI01 (2.5v), and NTC Temperature.
- GPS Data:** A section showing the status of GPS data such as Location Status, PMODE_I, and PMODE_II.

The bottom of the interface features a control panel with buttons for Unit ID, Send By, Authentication Code, Programming, Safety, Forward Data, Units List / Map, and Popups. There are also buttons for Status, Reboot, Comments, Custom, Text, and Decode.



7.3 Definition of Failure

Any loss of data.

Any change in the GPS status

8. Conducted Emission From DC Port

8.1 Test Specification

0.15-30 MHz, EN 55022: 2006 + Amendment A1: 2007, CLASS B

8.2 Test Procedure

The E.U.T operation mode and test set-up are as described in Section 7.1. In order to minimize background noise interference, the conducted emission testing was performed inside a shielded room (see Section 3), with the E.U.T (table-top) placed on a 0.8 meter high wooden table. Floor-standing E.U.T. was placed on the horizontal ground plane.

The E.U.T was powered from 12 VDC via 50 Ohm / 50 μ Hn Line Impedance Stabilization Network (LISN) on the DC Plus and DC Minus lines. The LISN's were grounded to the shielded room ground plane (floor), and were kept at least 0.8 meters from the nearest boundary of the E.U.T

The center of the E.U.T.'s AC cable was folded back and forth, in order to form a bundle less than 0.40 meters and a total cable length of 1 meter.

The effect of varying the position of the cables was investigated to find the configuration that produces maximum emission. The configuration tested is shown in the photograph, *Figure 11. Conducted Emission From DC Port Test.*

The emission voltages at the LISN's outputs were measured using a computerized receiver, complying with CISPR 16 requirements. The specification limits are pre-loaded to the receiver and are displayed on the receiver's spectrum display.

A frequency scan between 0.15 and 30 MHz was performed at 9 kHz I.F. band width, using peak detection.

The spectral components having the highest level on each line were measured using a quasi-peak and average detector.

8.3 Test Results

The E.U.T complies with the EN 55022: 2006 + Amendment A1: 2007, Class B specification requirements.

The margin between the emission levels and the specification limit is, in the worst case, 29.37 dB for the DC Plus line at 0.198 MHz and 28.12dB at 0.158 MHz for the DC Minus line.

The details of the highest emissions are given in *Figure 2* to *Figure 5*.

Conducted Emission

E.U.T Description Asset Tracking Device
 Type CelloTrack Power 3Y P/N
 GT976001-000
 Serial Number: 820052

Specification: EN 55022: 2006 + Amendment A1: 2007, Class B
 Lead: DC Plus
 Detectors: Quasi-peak, Average

EDIT PEAK LIST (Final Measurement Results)				
Trace1:		CE22BQP		
Trace2:		CE22BAP		
Trace3:		---		
TRACE		FREQUENCY	LEVEL dBμV	DELTA LIMIT dB
1	Quasi Peak	198 kHz	34.31	-29.37
2	Average	198 kHz	8.16	-45.52
1	Quasi Peak	314 kHz	27.77	-32.09
2	Average	314 kHz	6.84	-43.01
1	Quasi Peak	482 kHz	20.08	-36.21
2	Average	482 kHz	6.00	-40.29
1	Quasi Peak	766 kHz	12.89	-43.10
2	Average	1.106 MHz	9.11	-36.88
1	Quasi Peak	1.278 MHz	9.53	-46.46
2	Average	1.346 MHz	7.37	-38.62
1	Quasi Peak	3.046 MHz	23.20	-32.79
2	Average	3.046 MHz	9.10	-36.89
2	Average	4.058 MHz	9.11	-36.88
1	Quasi Peak	4.562 MHz	18.65	-37.34
1	Quasi Peak	8.626 MHz	14.28	-45.72
2	Average	8.63 MHz	8.60	-41.39
1	Quasi Peak	16.238 MHz	12.92	-47.07
2	Average	17.254 MHz	7.81	-42.18
2	Average	18.782 MHz	8.93	-41.06
1	Quasi Peak	27.926 MHz	15.23	-44.76

Date: 3.JUL.2014 09:10:57


Figure 2. Detectors: Quasi-peak, Average

Note: DELTA LIMIT refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Asset Tracking Device
 Type CelloTrack Power 3Y P/N
 GT976001-000
 Serial Number: 820052

Specification: EN 55022: 2006 + Amendment A1: 2007, Class B
 Lead: DC Plus Line
 Detectors: Quasi-peak, Average

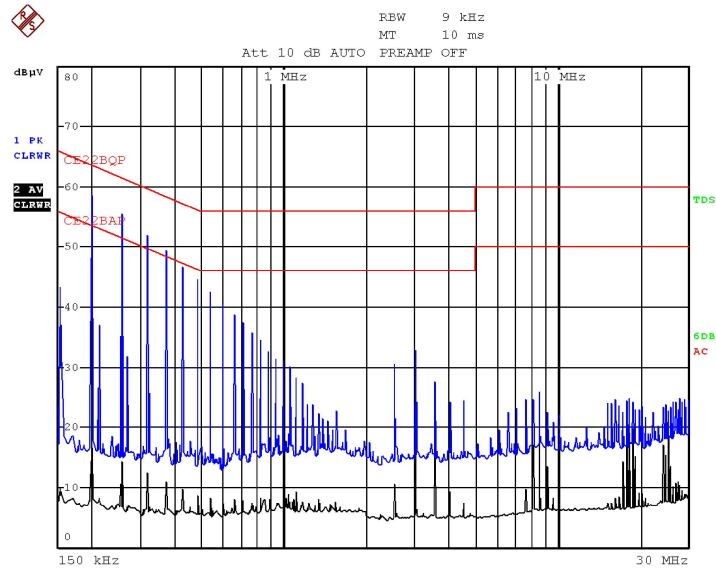

Date: 3.JUL.2014 09:09:48

Figure 3. Detectors: Quasi-peak, Average

Conducted Emission

E.U.T Description Asset Tracking Device
 Type CelloTrack Power 3Y P/N
 GT976001-000
 Serial Number: 820052

Specification: EN 55022: 2006 + Amendment A1: 2007, Class B
 Lead: DC Minus Line
 Detectors: Quasi-peak, Average

EDIT PEAK LIST (Final Measurement Results)			
TRACE	FREQUENCY	LEVEL dBuV	DELTA LIMIT dB
Trace1:	CE22BQP		
Trace2:	CE22BAP		
Trace3:	---		
1 Quasi Peak	158 kHz	37.44	-28.12
2 Average	158 kHz	9.10	-46.46
1 Quasi Peak	270 kHz	30.76	-30.35
2 Average	270 kHz	7.22	-43.89
1 Quasi Peak	438 kHz	22.34	-34.75
2 Average	506 kHz	8.13	-37.86
1 Quasi Peak	754 kHz	14.04	-41.95
2 Average	1.042 MHz	9.73	-36.27
1 Quasi Peak	1.258 MHz	9.45	-46.54
2 Average	1.358 MHz	7.73	-38.26
1 Quasi Peak	3.558 MHz	13.72	-42.27
2 Average	3.558 MHz	5.32	-40.67
1 Quasi Peak	4.054 MHz	11.64	-44.35
2 Average	4.058 MHz	5.71	-40.28
1 Quasi Peak	6.594 MHz	23.02	-36.97
2 Average	6.598 MHz	8.55	-41.44
1 Quasi Peak	10.658 MHz	15.52	-44.47
2 Average	11.166 MHz	9.52	-40.47
2 Average	21.318 MHz	9.41	-40.58
1 Quasi Peak	29.426 MHz	15.70	-44.29

Date: 3.JUL.2014 09:05:26


Figure 4. Detectors: Quasi-peak, Average

Note: DELTA LIMIT refer to the test results obtained minus specified requirement; thus a positive number indicates failure, and a negative result indicates that the product passes the test.

Conducted Emission

E.U.T Description Asset Tracking Device
 Type CelloTrack Power 3Y P/N
 GT976001-000
 Serial Number: 820052

Specification: EN 55022: 2006 + Amendment A1: 2007, Class B
 Lead: DC Minus Line
 Detectors: Quasi-peak, Average

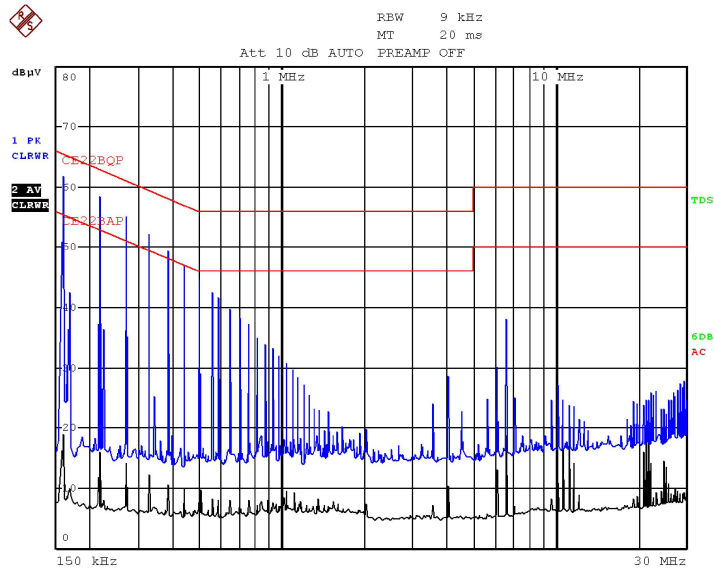

Date: 3.JUL.2014 09:03:59

Figure 5 Detectors: Quasi-peak, Average

9. Immunity to Electrostatic Discharge

9.1 Test Specification

EN 61000-4-2: 2009

9.2 Test Procedure

In the case of tabletop equipment, the E.U.T. was set up on a wooden table 0.8m high on an insulating support 0.5 mm thick above the reference ground plane. In the case of floor-standing equipment, the EUT and cables were set up on an insulating support 0.1m above the reference plane. The test setup is illustrated in the photograph, *Figure 12. Immunity to Electrostatic Discharge Test.*

Photographs in *Figure 6 to Figure 9* show the locations of test points.

9.2.1 Air Discharge

Potentials of 2, 4 and 8 kV were applied near each applicable test point. At places where discharge occurred, the potential was applied twenty times; ten times negative and ten times positive. The E.U.T.'s performance during the test was verified as detailed in Section 7.

9.2.2 Contact Discharge

Potentials of 2 and 4 kV were applied to each applicable test point. In places where discharge occurred, the potential was then applied twenty times; ten negative and ten positive discharges. The E.U.T.'s performance during the test was verified as detailed in Section 7.

9.2.3 Indirect Discharge (vertical and horizontal coupling plane)

Potentials of 2 and 4 kV were applied to the center of the vertical edge of the coupling plane at a distance of 0.1 meters from the outer casing of the E.U.T. to each applicable test point.

The potential was applied 10 times for each polarity, to each location of the coupling plane. All four faces of the E.U.T. were completely illuminated.

An ESD of the same characteristics as for the vertical coupling plane was applied to the horizontal coupling plane, at each side of the E.U.T., at a distance of 0.1 meter from its outer casing.

Additional details are shown in Figure 5 of EN 61000-4-2: 2009.

The E.U.T.'s performance during the test was verified as detailed in Section 7.

9.3 Test Results

The E.U.T met the requirements of specification EN 61000-4-2: 2009.

Immunity to Electrostatic Discharge

E.U.T Description Asset Tracking Device
Type CelloTrack Power 3Y P/N
 GT976001-000
Serial Number: 820052

Specification: EN 61000-4-2: 2009



Figure 6. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description Asset Tracking Device
Type CelloTrack Power 3Y P/N
 GT976001-000
Serial Number: 820052

Specification: EN 61000-4-2: 2009

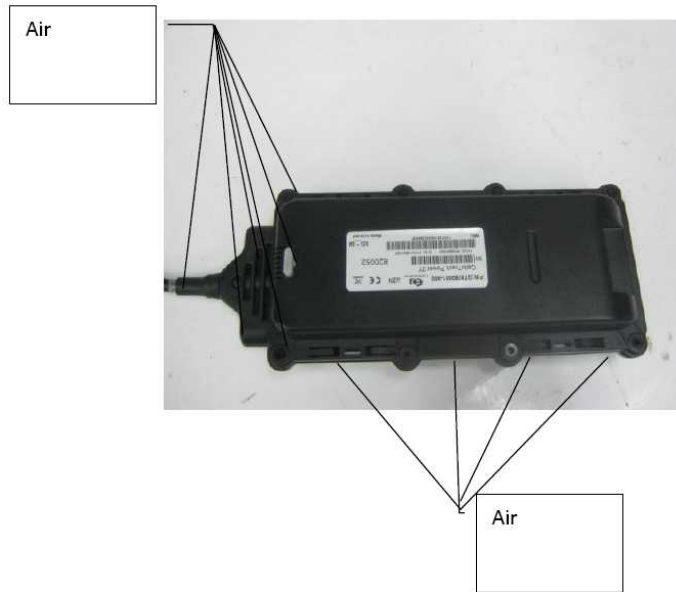


Figure 7. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description	Asset Tracking Device
Type	CelloTrack Power 3Y P/N GT976001-000
Serial Number:	820052

Specification: EN 61000-4-2: 2009

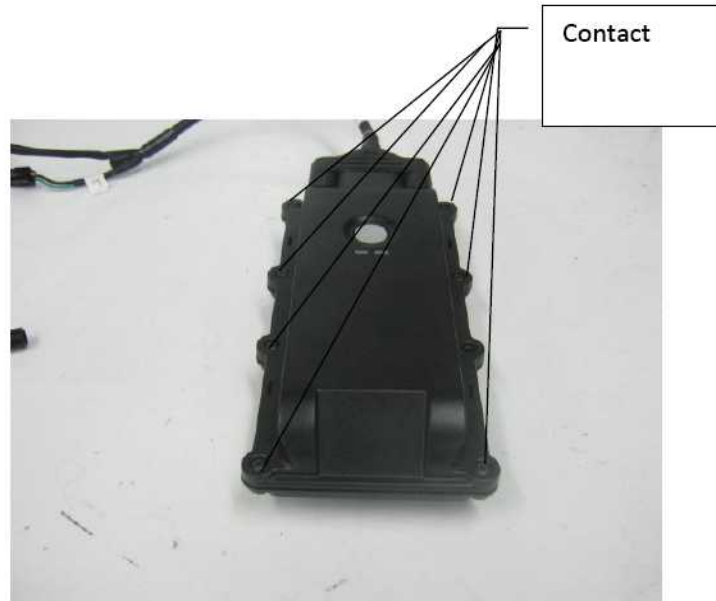


Figure 8. ESD Test Points

Immunity to Electrostatic Discharge

E.U.T Description Asset Tracking Device
Type CelloTrack Power 3Y P/N
 GT976001-000
Serial Number: 820052

Specification: EN 61000-4-2: 2009

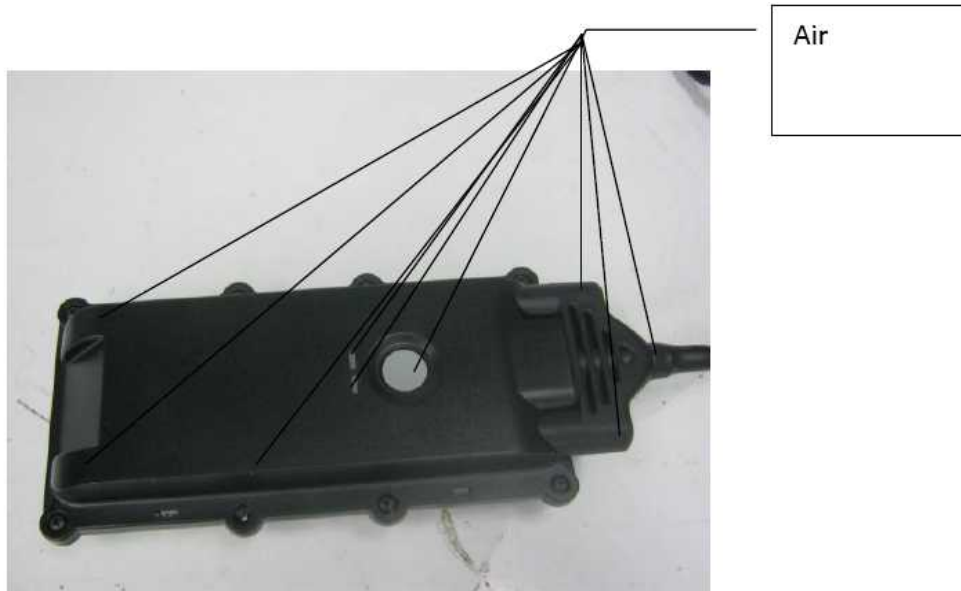


Figure 9. ESD Test Points

10. Immunity to Radiated Field

10.1 Test Specification

EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010

10.2 Test Procedure

The E.U.T. was subjected to a field of 3V/m, amplitude modulated 80% by a 1kHz sinusoidal signal.

The Radiated Field was applied in vertical and horizontal polarization using Biconilog Periodical antenna in the frequency range of 80-1000 and horn antennas in the frequency range of 1400 – 2700 MHz.

The Radiated Field was calibrated and tested for uniformity in accordance with Section 6.2 of IEC 61000-4-3.

The calibration values for the driver signal generator were based on the data given in I.T.L. "Radiated Immunity Calibration Test Report" No. PM-112R-IMM.

The frequency was swept using discrete increments having a value less than 1% of the fundamental frequency.

The performance of the E.U.T. was verified during the test as described in Section 7.

The test setup is illustrated in the photograph, *Figure 13. Immunity to Radiated Field Test*.

Note: Opinion and Interpretation:

The most sensitive surface of the E.U.T. was fully tested.

The most sensitive E.U.T. surface was determined as follows:

A preliminary radiated emission test in the frequency range 80 – 1000 MHz was performed inside the semi-anechoic chamber using an E-field probe and spectrum analyzer. The surface having the maximum radiation level was selected as the most sensitive surface.

10.3 Test Results

The E.U.T. passed the Radiated Immunity Tests as required by specifications:

EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010.

For additional information see *Figure 10*.



Radiated Immunity

E.U.T Description Asset Tracking Device
 Type CelloTrack Power 3Y P/N
 GT976001-000
 Serial Number: 820052

Specification: EN 61000-4-3: 2006 + Amendments A1: 2008; A2: 2010
 80-1000; 1400-2700 MHz

Amplitude Modulation: 80% AM by 1 kHz

Frequency (MHz)		Antenna Polarity	Specification (V/m)	PASS / FAIL	Immunity Threshold (V/m)
<u>From</u>	<u>To</u>				
80	1000	Horizontal	3.0	Pass	
80	1000	Vertical	3.0	Pass	
1400	2700	Horizontal	3.0	Pass	
1400	2700	Vertical	3.0	Pass	

Figure 10. Immunity to Radiated Field

11. Set Up Photographs



Figure 11. Conducted Emission From DC Port Test



Figure 12. Immunity to Electrostatic Discharge Test

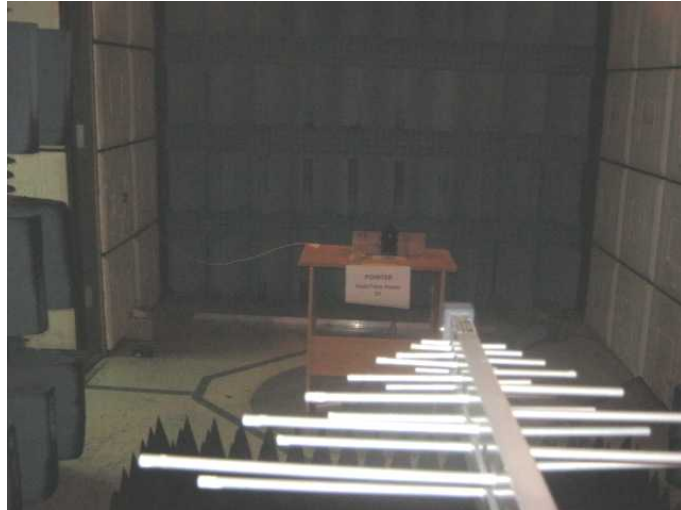


Figure 13. Immunity to Radiated Field Test



12. Signatures of the E.U.T's Test Engineers

Test	Test Engineer Name	Signature	Date
Conducted Emissions From DC Ports	A. Yizhak		07.08.14
ESD	A. Yizhak		07.08.14
Radiated Immunity	A. Yizhak		07.08.14